

# Polybutylene Push-fit Tank Connector

## PBF 64



### Features & Benefits

- 50 Year warranty
- Labour savings of 40%
- Twist and Lock push fittings
- Visible Connection
- Strong Stainless Grip Ring
- Permanent anti-leak system
- No tools required

### Material Specifications


NO	Description	Materials
1	Body	POM
2	Cap	POM
3	Collet	POM & SUS
4	O-Ring	NBR & EPDM
5	Colour	Black

### Technical Data

- Working Press@ Temp
  - 11 Bar @ 20°C
  - 7 Bar @ 65°C
- Maximum Permissible Torque Plastic - 3.0 Nm

### Applicable Standards

- Comply to ISO 9001 /14001
- WRAS
- SK ZERT(SK380-001)
- NSF/ANSI-51
- NSF/ANSI-61
- FDA
- ETA DANMARK
- Not suitable for hot water re-circulation systems

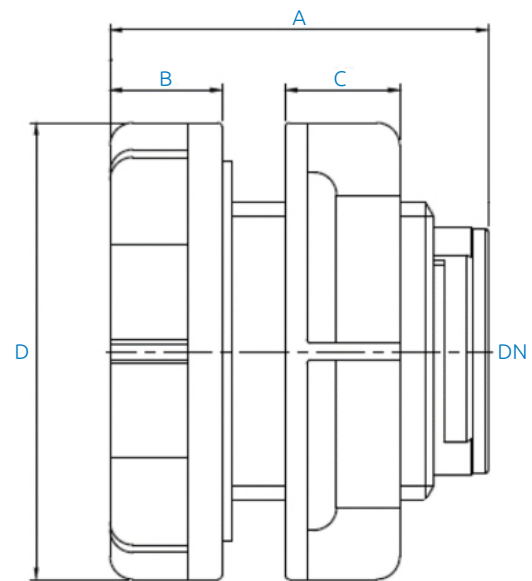

### Product Codes and Dimensions

STOCK NO.	DN	A (mm)	B (mm)	C (mm)	D (mm)
36063	15	43	14.7	12	51
36064	22	49.7	14.7	15	60