Copper Press Equal Tee (M-Profile)

MCP 30



KM 843518

Features and Benefits

- BSI Kitemark Awarded to BS EN 1254-7
- Press-Sure System to ensure complete joint formation
  - Engineered Leak Path Technology
  - Visual Press Indicator Foils
- Friction Fit
- 100% lead-free system
- WRAS approved
- Durable, Secure Leak-Tight Joint
- Flame-Free Installation
- Faster, More Efficient Installation
- 25-Year Warranty
- BIM Files available

Brymec 25 Year Warranty

WRAS APPROVED PRODUCT

Technical Data


- Maximum Working Pressure 16 Bar
- Maximum Operating temperature 99°C
- "M" profile press jaws or slings
- Approved tools include Novapress, REMS, Rothenberger and Ridgid

Applicable Standards

- WRAS approved
- For use with BS EN 1057:2006 copper tube equivalent to Table X
- BSI Kitemark awarded to BS EN 1254-7

Material Specifications

NO	Description	Materials
1	Body	Cu-DHP (CW024A)
2	Crimp indicator film	PVC, Blue
3	O-Ring	EPDM
4	Dust Cap	PE

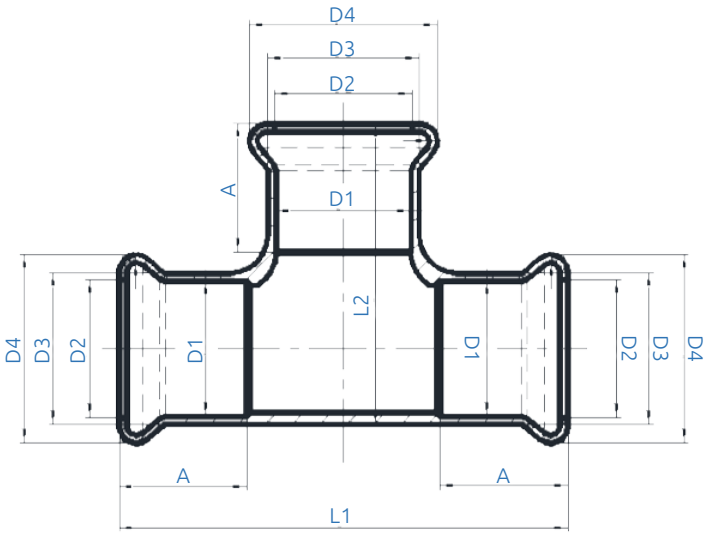

Product Codes and Dimensions (mm)

Product Code	D1	D2	D3	D4	A	L1	L2
27850	15	15.6	18	23	19	64	41
27851	22	22.8	25	31.3	20	74	49.5
27852	28	28.8	31	37.4	22	84	57
27853	35	35.7	38.3	44.7	25	100	69
27854	42	42.8	45.3	53.5	29	116	86
27855	54	54.8	57.3	65.3	34	139	98
27856	67	69.1	71.7	82.6	48	189	133
27857	76	78.6	81.1	94.4	49	208	139.5
27859	108	110.9	113.8	132.1	65	273	196