

# Single Boss Pipe CIS62



## Technical Data

- Chemical resistance to wide range: pH2 to pH12
- Tensile strength:  $\geq 150$  MPa
- Compression strength:  $\geq 450$  MPa
- Shear strength:  $\geq 165$  MPa
- Density: approx.  $7.2 \text{ kg/dm}^3$  ( $71.5 \text{ kN/m}^3$ )
- Low thermal expansion ( $0.0105 \text{ mm/mK}$ )

## Applicable Standards

- Pipe and Fittings Standard: EN 877




## Features and Benefits

- Excellent acoustic properties
- Fully recyclable
- High durability and abrasion resistance
- Optimum corrosion protection
- Sturdy and dimensionally stable
- Rapid and simple assembly

## Material Specifications

Description	Materials
Core	Grey Cast Iron with lamellar graphite
Coating	Cross-linked red-brown colour resin epoxy coating ( $40 \mu\text{m}$ )

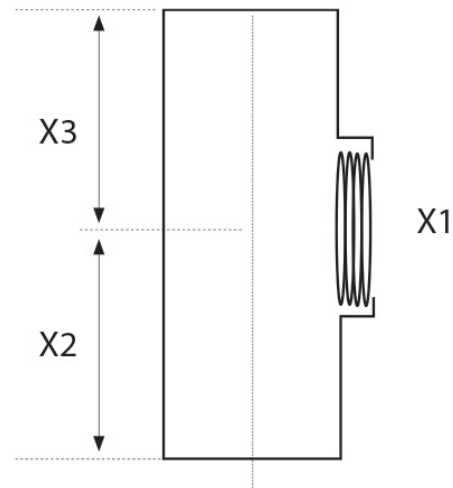

## Product Codes and Dimensions

STOCK NO.	Nominal Dimension (mm)	L (mm)	Outlet (BSP)	X1 (mm)	X2 (mm)	Weight (Kg)
52154	50	150	2"	75	75	0.90
52156	100	150	2"	75	75	2.00