



**INSTITUTO DE CIENCIAS
DE LA CONSTRUCCIÓN
EDUARDO TORROJA**

C/ Serrano Galvache n. 4 28033 Madrid (Spain)
Tel.: (34) 91 302 04 40 Fax: (34) 91 302 07 00
direccion.ietcc@csic.es <https://dit.ietcc.csic.es>

European Technical Assessment

**ETA 14/0068
of 04/03/2021**

English translation prepared by IETcc. Original version in Spanish language

General Part

Technical Assessment Body issuing the ETA designated according to Art. 29 of Regulation (EU) 305/2011:

Instituto de Ciencias de la Construcción Eduardo Torroja (IETcc)

Trade name of the construction product:

HEHO, HECLO, HEHC, HEA4, HEC4 drop in anchor

Product family to which the construction product belongs:

Deformation controlled anchor made of galvanized steel or stainless steel or stainless steel of sizes M6, M8, M10, M12, M16 and M20 for use in concrete for redundant non-structural systems

Manufacturer:

Index - Técnicas Expansivas S.L.
Segador 13.
26006 Logroño (La Rioja) Spain.
website: www.indexfix.com

Manufacturing plant:

Index plant 2

This European Technical Assessment contains:

12 pages including 3 annexes which form an integral part of this assessment.

This European Technical Assessment is issued in accordance with regulation (EU) No 305/2011, on the basis of:

European Assessment Document EAD 330747-00-0601, "Fasteners for use in concrete for redundant non-structural systems", ed. May 2018.

This version replaces:

ETA 14/0068 issued on 31/07/2020

English translation prepared by IETcc

This European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission according to article 25 (3) of Regulation (EU) No 305/2011.

English translation prepared by IETcc

SPECIFIC PART

1. Technical description of the product

The Index HEHO, HECLO, HEHC, in the range of M6 to M20, is an anchor made of galvanised steel. The Index HEA4, HEC4, in the range of M6 to M20, is an anchor made of stainless steel. They are placed into a drilled hole and anchored by deformation-controlled expansion. The anchorage is characterised by friction between the sleeve and concrete.

Product and installation descriptions are given in annexes A1 and A2.

2. Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a mean to choosing the right products in relation to the expected economically reasonable working life of the works.

3. Performance of the product and references to the methods used for its assessment

3.1 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for class A1 according to EN13501-1
Resistance to fire	See annex C5

3.2 Safety in use (BWR 4)

Essential characteristic	Performance
Characteristic resistance under static or quasi static loading	See annexes C3 and C4

4. Assessment and Verification of Constancy of Performances (hereinafter AVCP) system applied, with reference to its legal base

The applicable European legal act for the system of Assessment and Verification of Constancy of Performances (see annex V to Regulation (EU) No 305/2011) is 97/161/EC.

The system to be applied is 2+.

English translation prepared by IETcc

5. Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

The technical details necessary for the implementation of the AVCP system are laid down in the quality plan deposited at Instituto de Ciencias de la Construcción Eduardo Torroja.



Instituto de Ciencias de la Construcción Eduardo Torroja
CONSEJO SUPERIOR DE INVESTIGACIONES CIENTÍFICAS

C/ Serrano Galvache n.º 4. 28033 Madrid.
Tel: (+34) 91 302 04 40 Fax: (+34) 91 302 07 00

<https://dit.ietcc.csic.es>



On behalf of the Instituto de Ciencias de la Construcción Eduardo Torroja
Madrid, 4th of March 2021




Director IETcc - CSIC

English translation prepared by IETcc


Product



HEHO anchor

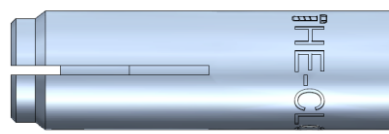

HECLO anchor



HEHC anchor



HEH4 anchor



HEC4 anchor

Identification on sleeve: Index logo + “HEHO (HECLO, HEHC, HEA4, HEC4)” + Metric; e.g:  HEHO M6

Table A1: Dimensions

Anchor dimensions	M6	M8	M10	M12	M12D	M16	M20
HEHO, HECLO							
ØD: External diameter [mm]	8	10	12	15	16	20	25
Ød: internal diameter [mm]	M6	M8	M10	M12	M12	M16	M20
L: total length [mm]	25	30	40	50	50	65	80
HEHC							
ØD: External diameter [mm]	--	10	12	15	--	--	--
Ød: internal diameter [mm]	--	M8	M10	M12	--	--	--
L: total length [mm]	--	25	25	25	--	--	--
HEA4, HEC4							
ØD: External diameter [mm]	8	10	12	15	--	20	25
Ød: internal diameter [mm]	M6	M8	M10	M12	--	M16	M20
L: total length [mm]	25	30	40	50	--	65	80

Table A2: Materials

Item	Designation	Material for HEHO, HECLO, HEHC	Material for HEA4, HEC4
1	Sleeve	Carbon steel, zinc plated $\geq 5 \mu\text{m}$ ISO 4042 Zn5/An/T0	Stainless steel, grade A4
2	Cone	Carbon steel, zinc plated $\geq 5 \mu\text{m}$ ISO 4042 Zn5/An/T0	Stainless steel, grade A4
3	Retention disc	Plastic	Plastic

HEHO, HECLO, HEHC, HEA4, HEC4 anchor


Product description

Product and materials

Annex A1

English translation prepared by IETcc

Installed condition

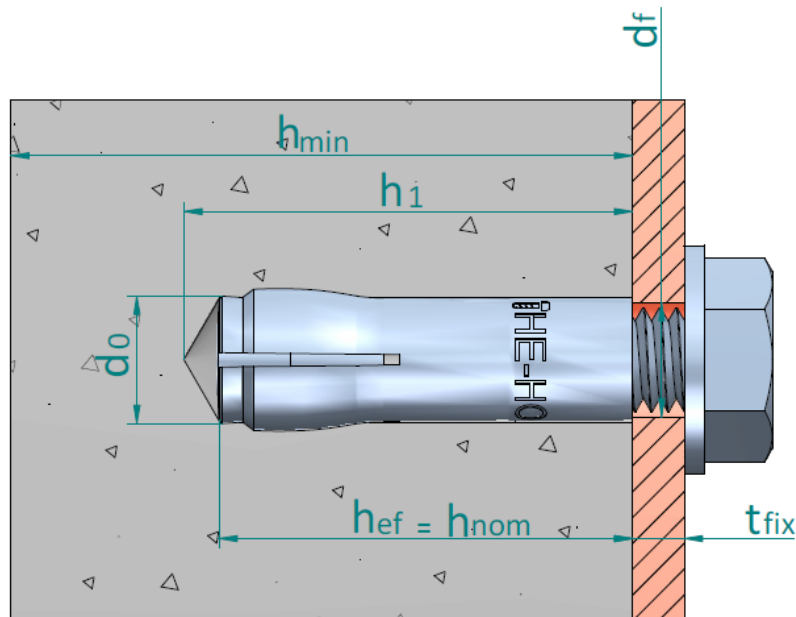

- h_{ef} : Effective anchorage depth
- h_1 : Depth of drilled hole
- h_{nom} : Overall anchor embedment depth in the concrete
- h_{min} : Minimum thickness of concrete member
- t_{fix} : Thickness of fixture
- d_0 : Nominal diameter of drill bit
- d_f : Fixture clearance hole diameter

Setting tool



Table A3: Setting tool dimensions

Setting tool dimensions		M6	M8	M10	M12	M16	M20
HEHO, HECLO, HEA4, HEC4							
Ø D ₁	[mm]	8.0	10.0	12.0	15.0	20.0	25.0
Ø D ₂	[mm]	4.9	6.4	8.2	10.0	13.5	17.0
L _s	[mm]	15.0	18.0	21.0	30.0	36.0	40.0
HEHC							
Ø D ₁	[mm]	--	10.0	12.0	15.0	--	--
Ø D ₂	[mm]	--	6,4	8,2	10,0	--	--
L _s	[mm]	--	15.0	16.0	10.4	--	--

Setting tool can be assembled with a plastic handle for hand protection purposes

HEHO, HECLO, HEHC, HEA4, HEC4 anchor

Product description

Installed condition and setting tool

Annex A2

Specifications of intended use

Anchorage subjected to:

- Static or quasi static loads for redundant non-structural systems
- Fire exposure
- The anchor may only be used if in the design and installation specifications for the fixture the excessive slip or failure of one anchor will not result in a significant violation of the requirements on the fixture in the serviceability and ultimate state.

Base materials:

- Reinforced or unreinforced normal weight concrete without fibres according to EN 206-1:2013+A1:2016
- Strength classes C12/15 to C50/60 according to EN 206-1:2013+A1:2016: HEHO / HECLO anchors
- Strength classes C20/25 to C50/60 according to EN 206-1:2013+A1:2016: HEHC / HEA4 / HEC4 anchors
- Cracked or uncracked concrete

Use conditions (environmental conditions):

- HEHO, HECLO, HEHC: anchorages subjected to dry internal conditions.
- HEA4, HEC4: anchorages subjected to dry internal conditions, to external atmospheric exposure (including industrial and marine environment) or to permanent internal damp conditions if no particular aggressive conditions exist. Such particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used). Atmospheres under Corrosion Resistance Class CRC III according to EN 1993-1-4:2006+A1:2015 annex A.

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete.
- Verifiable calculation rules and drawings are prepared taking into account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages under static or quasi-static actions are designed for design method B in accordance with EN 1992-4:2018
- Anchorages under fire exposure are designed in accordance to EN 1992-4:2018. It must be ensured that local spalling of the concrete cover does not occur.

Installation:

- Hole drilling by rotary plus hammer mode.
- Anchor installation carried out by appropriately qualified personal and under the supervision of the person responsible for technical matters of the site.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of aborted hole or smaller distance if the aborted hole is filled with high strength mortar and if under shear or oblique tension load it is not the direction of the load application.
- HEHO, HECLO, HEHC: the bolt or threaded rod to be used shall be property class 4.6, 5.6, 5.8, 6.8 or 8.8 according to ISO 898-1.
- HEA4, HEC4: the bolt or threaded rod to be used shall be property class A4-50, A4-70 or A4-80 according to EN 3506-1:2009
- The length of the bolt shall be determined as:
 - Minimum bolt length = $t_{fix} + l_{s,min}$
 - Maximum bolt length = $t_{fix} + l_{s,max}$

HEHO, HECLO, HEHC, HEA4, HEC4 anchor	
Intended use	Annex B1
Specifications	

English translation prepared by IETcc

Table C1: Installation parameters for HEHO, HECLO, HEHC, HEA4, HEC4 anchor

Installation parameters			Performances						
			M6	M8	M10	M12	M12D	M16	M20
d ₀	Nominal diameter of drill bit:	[mm]	8	10	12	15	16	20	25
D	Thread diameter:	[mm]	M6	M8	M10	M12	M12	M16	M20
d _f	Fixture clearance hole diameter ≤	[mm]	7	9	12	14	14	18	22
T _{inst}	Maximum installation torque:	[Nm]	4	11	17	38	38	60	100
HEHO, HECLO			M6 x 25	M8 x 30	M10 x 40	M12 x 50	M12 x 50	M16 x 65	M20 x 80
l _{s,min}	Minimum screwing depth:	[mm]	6	8	10	12	12	16	20
l _{s,max}	Maximum screwing depth:	[mm]	10	13	17	21	21	27	34
h ₁	Depth of drilled hole:	[mm]	27	33	43	54	54	70	86
h _{nom}	Overall anchor embedment depth:	[mm]	25	30	40	50	50	65	80
h _{ef}	Effective anchorage depth:	[mm]	25	30	40	50	50	65	80
h _{min}	Minimum thickness of concrete member:	[mm]	100	100	100	100	100	130	160
s _{min}	Minimum allowable spacing:	[mm]	60	60	80	100	100	130	160
c _{min}	Minimum allowable distance:	[mm]	105	105	140	175	130	230	280
HEHC			-	M8 x 25	M10 x 25	M12 x 25	-	-	-
l _{s,min}	Minimum screwing depth:	[mm]	--	7	8	10	--	--	--
l _{s,max}	Maximum screwing depth:	[mm]	--	12	13	13	--	--	--
h ₁	Depth of drilled hole:	[mm]	--	28	28	29	--	--	--
h _{nom}	Overall anchor embedment depth:	[mm]	--	25	25	25	--	--	--
h _{ef}	Effective anchorage depth:	[mm]	--	25	25	25	--	--	--
h _{min}	Minimum thickness of concrete member:	[mm]	--	80	80	80	--	--	--
s _{min}	Minimum allowable spacing:	[mm]	--	75	75	75	--	--	--
c _{min}	Minimum allowable distance:	[mm]	--	60	60	60	--	--	--
HEA4, HEC4			M6 x 25	M8 x 30	M10 x 40	M12 x 50	-	M16 x 65	M20 x 80
l _{s,min}	Minimum screwing depth:	[mm]	6	8	10	12	--	16	20
l _{s,max}	Maximum screwing depth:	[mm]	10	13	17	21	--	27	34
h ₁	Depth of drilled hole:	[mm]	27	33	43	54	--	70	86
h _{nom}	Overall anchor embedment depth:	[mm]	25	30	40	50	--	65	80
h _{ef}	Effective anchorage depth:	[mm]	25	30	40	50	--	65	80
h _{min}	Minimum thickness of concrete member:	[mm]	80	80	80	100	--	130	160
s _{min}	Minimum allowable spacing:	[mm]	60	60	100	100	--	130	160
c _{min}	Minimum allowable distance:	[mm]	65	80	100	130	--	175	210

HEHO, HECLO, HEHC, HEA4, HEC4 anchor


Performances

Installation parameters

Annex C1

English translation prepared by IETcc

Installation process

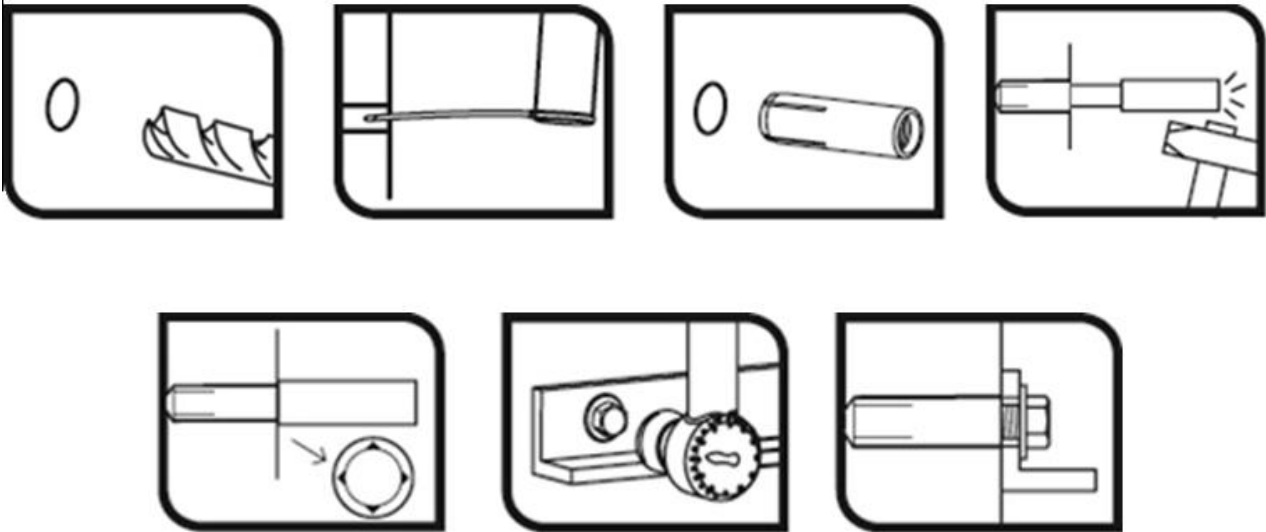

HEHO, HECLO, HEHC, HEA4, HEC4 anchor	Annex C2
Performances	
Installation procedure	

English translation prepared by IETcc

Table C2: Characteristic values to loads of design method B according to EN 1992-4 for HEHO, HECLO, HEHC anchor

Characteristic values of resistance to loads of design method B			Performances						
			M6	M8	M10	M12	M12D	M16	M20
Any load direction									
HEHO, HECLO									
F_{Rk}^0	Characteristic resistance in C12/15 concrete:	[kN]	1.5	3.0	4.0	6.0	--	9.0	16.0
F_{Rk}^0	Characteristic resistance in C20/25 to C50/60 concrete:	[kN]	2.0	3.0	5.0	7.5	6.0	12.0	20.0
γ_{ins}	Installation safety factor:	[-]	1.2	1.2	1.4	1.4	1.4	1.4	1.4
S_{cr}	Critical spacing:	[mm]	75	90	120	150	200	195	240
C_{cr}	Critical edge distance:	[mm]	40	45	60	75	150	100	120
HEHC									
F_{Rk}^0	Characteristic resistance in C20/25 to C50/60 concrete:	[kN]	--	2.5	4.0	4.0	--	--	--
γ_{ins}	Installation safety factor:	[-]	--	1.2	1.2	1.2	--	--	--
S_{cr}	Critical spacing:	[mm]	--	120	120	120	--	--	--
C_{cr}	Critical edge distance:	[mm]	--	60	60	60	--	--	--
Shear loads: steel failure with lever arm									
$M_{Rk,s}^0$	Characteristic bending moment, steel class 4.6	[Nm]	6.1	15.0	29.9	52.4	52.4	133.3	259.8
$\gamma_{Ms}^{1)}$	Partial safety factor:	[-]	1.67						
$M_{Rk,s}^0$	Characteristic bending moment, steel class 4.8	[Nm]	6.1	15.0	29.9	52.4	52.4	133.3	259.8
$\gamma_{Ms}^{1)}$	Partial safety factor:	[-]	1.25						
$M_{Rk,s}^0$	Characteristic bending moment, steel class 5.6	[Nm]	7.6	18.8	37.4	65.5	65.5	166.6	324.8
$\gamma_{Ms}^{1)}$	Partial safety factor:	[-]	1.67						
$M_{Rk,s}^0$	Characteristic bending moment, steel class 5.8	[Nm]	7.6	18.8	37.4	65.5	65.5	166.6	324.8
$\gamma_{Ms}^{1)}$	Partial safety factor:	[-]	1.25						
$M_{Rk,s}^0$	Characteristic bending moment, steel class 6.8	[Nm]	9.2	22.5	44.9	78.7	78.7	199.9	389.7
$\gamma_{Ms}^{1)}$	Partial safety factor:	[-]	1.25						
$M_{Rk,s}^0$	Characteristic bending moment, steel class 8.8	[Nm]	12.2	30.0	59.9	104.9	104.9	266.6	519.7
$\gamma_{Ms}^{1)}$	Partial safety factor:	[-]	1.25						

1) In absence of other national regulations

HEHO, HECLO, HEHC anchor	Annex C3
Performances	
Characteristic resistances	

English translation prepared by IETcc

Table C3: Characteristic values to loads of design method B according to EN 1992-4 for HEA4, HEC4 anchor

Characteristic values of resistance to loads of design method B			Performances					
			M6	M8	M10	M12	M16	M20
All load direction								
F_{Rk}^0	Characteristic resistance in C20/25 to C50/60 concrete:	[kN]	2.5	3.5	3.5	6.5	12.5	16.5
γ_{ins}	Installation safety factor:	[-]	1.4					
S_{cr}	Critical spacing:	[mm]	200	200	200	200	260	320
C_{cr}	Critical edge distance:	[mm]	150	150	150	150	195	240
Shear loads: steel failure with lever arm								
$M_{Rk,s}^0$	Characteristic bending moment, steel class A4-50	[Nm]	7.6	18.8	37.4	65.6	166.6	324.8
$\gamma_{Ms}^{1)}$	Partial safety factor:	[-]	2.38					
$M_{Rk,s}^0$	Characteristic bending moment, steel class A4-70	[Nm]	10.6	6.3	52.4	91.8	233.1	454.7
$\gamma_{Ms}^{1)}$	Partial safety factor:	[-]	1.56					
$M_{Rk,s}^0$	Characteristic bending moment, steel class A4-80	[Nm]	12.2	30.0	59.9	104.9	266.6	519.7
$\gamma_{Ms}^{1)}$	Partial safety factor:	[-]	1.34					

1) In absence of other national regulations

HEA4, HEC4 anchor	Annex C4
Performances	
Characteristic resistances	

English translation prepared by IETcc

Table C4: Characteristic resistance under fire exposure in concrete C20/25 to C50/50 in any load direction according to EN 1992-4 for HEHO, HECLO anchor

Characteristic resistance under fire exposure in concrete C20/25 to C50/60 in any load direction for use in concrete			Performances						
			M6	M8	M10	M12	M12D	M16	M20
R30	Characteristic resistance: $F_{Rk,fi30}^{0}$ ¹⁾	[kN]	0.2	0.4	0.9	1.7	1.7	3.1	4.9
R60	Characteristic resistance: $F_{Rk,fi60}^{0}$ ¹⁾	[kN]	0.2	0.3	0.8	1.3	1.3	2.4	3.7
R90	Characteristic resistance: $F_{Rk,fi90}^{0}$ ¹⁾	[kN]	0.1	0.3	0.6	1.1	1.1	2.0	3.2
R120	Characteristic resistance: $F_{Rk,fi120}^{0}$ ¹⁾	[kN]	0.1	0.2	0.5	0.8	0.8	1.6	2.5
R30 to	Spacing	$S_{cr,fi}$ [mm]	4 x hef						
R120	Edge distance	$C_{cr,fi}$ [mm]	2 x hef						

¹⁾ in absence of other national regulations the partial safety factor for resistance under fire exposure $\gamma_{M,fi} = 1.0$ is recommended
If fire attack is from more than one side, the design method may be taken if edge distance of the anchor is $c \geq 300$ mm

Table C5: Characteristic resistance under fire exposure in concrete C20/25 to C50/50 in any load direction according to EN 1992-4 for HEHC anchor

Characteristic resistance under fire exposure in concrete C20/25 to C50/60 in any load direction for use in concrete			Performances					
			M6	M8	M10	M12	M16	M20
R30	Characteristic resistance: $F_{Rk,fi30}^{0}$ ¹⁾	[kN]	--	0.54	0.54	0.54	--	--
R60	Characteristic resistance: $F_{Rk,fi60}^{0}$ ¹⁾	[kN]	--	0.54	0.54	0.54	--	--
R90	Characteristic resistance: $F_{Rk,fi90}^{0}$ ¹⁾	[kN]	--	0.44	0.54	0.54	--	--
R120	Characteristic resistance: $F_{Rk,fi120}^{0}$ ¹⁾	[kN]	--	0.37	0.43	0.43	--	--
R30 to	Spacing	$S_{cr,fi}$ [mm]	--	4 x hef-			--	--
R120	Edge distance	$C_{cr,fi}$ [mm]	--	2 x hef			--	--

¹⁾ in absence of other national regulations the partial safety factor for resistance under fire exposure $\gamma_{M,fi} = 1.0$ is recommended
If fire attack is from more than one side, the design method may be taken if edge distance of the anchor is $c \geq 300$ mm

Table C6: Characteristic resistance under fire exposure in concrete C20/25 to C50/50 in any load direction according to EN 1992-4 for HEA4, HEC4 anchor

Characteristic resistance under fire exposure in concrete C20/25 to C50/60 in any load direction for use in concrete			Performances					
			M6	M8	M10	M12	M16	M20
R30	Characteristic resistance: $F_{Rk,fi30}^{0}$ ¹⁾	[kN]	0.20	0.73	0.87	1.63	3.19	4.12
R60	Characteristic resistance: $F_{Rk,fi60}^{0}$ ¹⁾	[kN]	0.18	0.59	0.87	1.63	3.19	4.12
R90	Characteristic resistance: $F_{Rk,fi90}^{0}$ ¹⁾	[kN]	0.14	0.44	0.87	1.63	3.14	4.12
R120	Characteristic resistance: $F_{Rk,fi120}^{0}$ ¹⁾	[kN]	0.10	0.37	0.69	1.30	2.51	3.30
R30 to	Spacing	$S_{cr,fi}$ [mm]	4 x hef					
R120	Edge distance	$C_{cr,fi}$ [mm]	2 x hef					

¹⁾ in absence of other national regulations the partial safety factor for resistance under fire exposure $\gamma_{M,fi} = 1.0$ is recommended
If fire attack is from more than one side, the design method may be taken if edge distance of the anchor is $c \geq 300$ mm

HEHO, HECLO, HEHC, HEA4, HEC4 anchor

Performances

Resistances under fire exposure

Annex C5