


Rapid Overclamp

CIS06

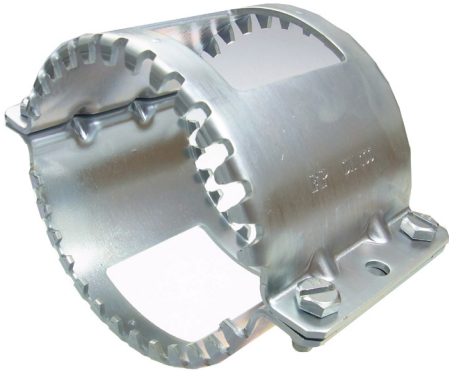

Technical Data

- Galvanised Steel Overclamp
- Axial Restraint up to 10.0 Bar
- For rainwater and wastewater pipes in pressurised pipes and areas affected by backwater
- DN50-125 – 2 Part Collar with 4 Bolts
- DN150 – 3 Part Collar with 6 Bolts
- DN200-300 – 1 Part Collar with 2 Bolts

Applicable Standards

- For Pipe and Fittings Standard: EN 877




Features and Benefits

- Grip Collar with claws
- Clamp used in addition to the Rapid coupling for pressure and backwater pipes
- Use with pipe support brackets for axially restrained joints

Material Specifications

Description	Materials
Clamp	DD11 Galvanised
Clamping Bolts	BZP Steel

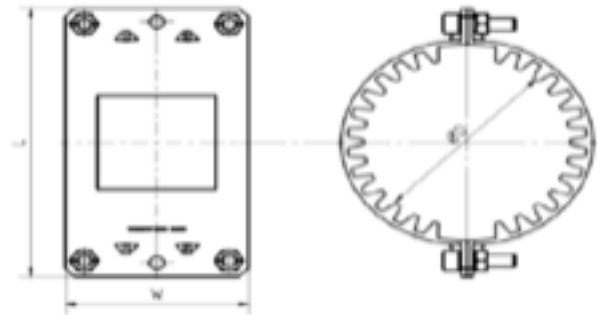

Product Codes and Dimensions

STOCK NO	Nominal Diameter (mm)	Torque (N/m)	P max (Bar)	L (mm)	W (mm)	Weight (Kg)
52023	50	27- 29	10	120	77	0.46
52024	70	27- 29	10	140	77	0.56
52025	100	27- 29	7	172	96	0.91
52026 *	125	27- 29	6	196	96	1.09
52027	150	27- 29	4	221	96	1.26
52028 *	200	In Abutment	5	270	113	2.00
52029 *	250	In Abutment	3	335	139	2.88
52030 *	300	In Abutment	3	490	139	3.00

* Special Order / Project Items