


CSST Copper Compression Adaptor CSS 04



This Brymec product is not manufactured by and has no connection with GFS Flex

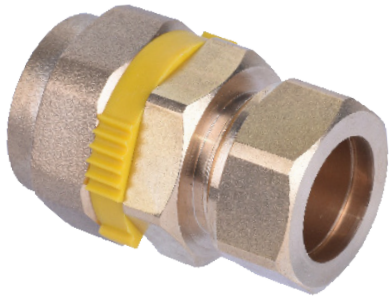

KM 714530
BS EN 15266: 2007



Features and Benefits

- Easy installation
- No welding, no painting, no overwrapping required
- Chemical resistant
- Push fit and tighten fittings provide a fast connection and perfectly even flare
- Compression fittings provide dual metal/metal and silicone rubber seal
- Time and labour saving
- 10 year warranty on CSST and fittings

Materials Specifications

NO.	COMPONENT	MATERIAL	REF
1	Nut	CW 614 N	EN 12165
2	Retainer	Cw458K	EN 12164
3	Flat Gasket	NBR	EN 549/A2/H3
4	Nipple Body	CW 614 N	EN 12164
5	Clip Ring	Plastic	-
6	Compression Olive	CW 614 N	EN 12164
7	Compression Nut	CW 614 N	EN 12164
8	Copper Tube (supplied by others)	Copper	EN 1057

Product Codes & Dimensions

STOCK NO.	SIZE	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
29071	DN15 x 15mm	32	59.5	23.0	39.5	15	M22 x 1.5	27
29072	DN20 x 15mm	35	59.5	22.5	39.5	15	M22 x 1.5	27
29073	DN20 x 22mm	35	59.5	22.5	39.5	22	M28 x 2	32
29074	DN25 x 22mm	45	62.0	25.5	43.5	22	M28 x 2	32
29075	DN25 x 28mm	45	62.0	25.5	43.5	28	M36 x 2	41
29076	DN32 X 22mm	55	59.0	19.0	37.0	22	m28 X 2	32
29078	DN32 x 28mm	55	59.0	19.0	37.0	28	M36 x 2	41
29077	DN32 x 35mm	55	59.5	19.0	37.0	35	M45 x 2	50

Technical Data

- Manufactured to BS EN 15266 CSST Gas installation in buildings
- Max operating pressure 0.5 Bar
- Removable yellow clip for simple installation
- 1st, 2nd & 3rd family gases to EN 437
- Fire classification: B-s1-d0

Tightening Torque

TUBE DIAMETER DN	Min (Nm)	Max (Nm)
DN15	65	95
DN20	90	130
DN25	105	150
DN32	125	170

