

Stainless Press Coupling

MSP01



Technical Data

- Operating temperature -20°C ~ +120°C
- 316L Stainless Steel fitting
- EPDM Sealing ring
- "M" Profile Press Jaws or slings
- Approved tools include Novapress, REMS, Rothenberger and Ridgid
- Max Working Pressure
 - 15mm - 28mm : 40 bar
 - 35mm - 54mm : 25bar
 - 76mm - 108mm 16 bar




Features and Benefits

- Suitable for Potable water, Cooling systems, Industrial applications
- High grade Stainless Steel is extremely durable and corrosion resistant
- Blue plastic film which will fall off when crimped for easy identification of pressed joint
- Dust covers
- 30 Year Warranty

Applicable Standards

- WRAS Approved
- 316L grade stainless steel fitting
- DVGW-W534

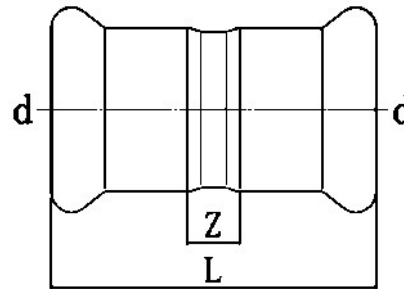

Material Specifications

Description	Materials
Body	316L Stainless Steel
Crimp indicator film	PVC, Blue
O-Ring	EPDM
Dust Cap	PE

Product Codes and Dimensions

STOCK NO.	D (mm)	L (mm)	Z (mm)
29439	15	48	8
29440	22	50	8
29441	28	54	8
29442	35	62	10
29443	42	71	11
29444	54	83	13
29445	76	141	35
29446	89	162	42
29447	108	194	44