

# Stainless Press Reducing Tee

## MSP31



### Features and Benefits

- Suitable for Potable water, Cooling systems, Industrial applications
- High grade Stainless Steel is extremely durable and corrosion resistant
- Blue plastic film which will fall off when crimped for easy identification of pressed joint
- Dust covers
- 30 Year Warranty

### Material Specifications

Description	Materials
Body	316L Stainless Steel
Crimp indicator film	PVC, Blue
O-Ring	EPDM
Dust Cap	PE

### Product Codes and Dimensions


STOCK NO	d (mm)	d1 (mm)	d2 (mm)	L (mm)	Z (mm)	H (mm)	Z1 (mm)
29385	22	15	15	74	16	42	22
29386	22	15	22	74	16	42	22
29387	28	15	28	84	19	45	25
29388	28	22	22	84	19	47	26
29389	28	22	28	84	19	47	26
29390	35	15	35	100	24	49	29
29391	35	22	35	100	24	51	30
29392	35	28	35	100	24	56	33
29393	42	22	42	114	27	55	34
29394	42	28	42	114	27	60	37
29395	42	35	42	114	27	61	34
29396	54	22	54	138	34	61	40
29397	54	28	54	138	34	66	43
29398	54	35	54	138	34	67	40

### Technical Data

- Operating temperature -20°C ~ +120°C
- 316L Stainless Steel fitting
- EPDM Sealing ring
- "M" Profile Press Jaws or slings
- Approved tools include Novapress, REMS, Rothenberger and Ridgid
- Max Working Pressure
  - 15mm - 28mm : 40 bar
  - 35mm - 54mm : 25 bar
  - 76mm - 108mm : 16 bar

### Applicable Standards

- WRAS Approved
- 316L grade stainless steel fitting
- DVGW-W534

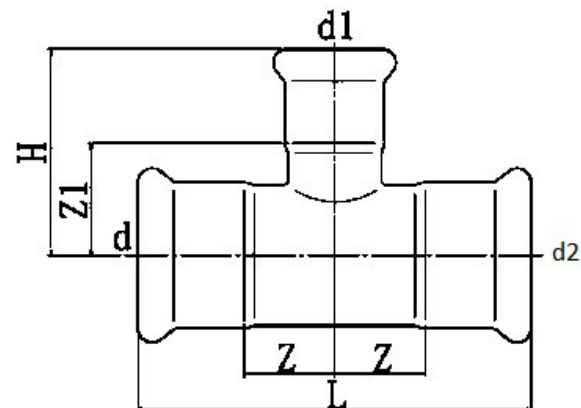

## Product Codes and Dimensions

STOCK NO	d (mm)	d1 (mm)	d2 (mm)	L (mm)	Z (mm)	H (mm)	Z1 (mm)
29399	54	42	54	138	34	72	38
29400	76	22	76	230	62	71	50
29401	76	28	76	230	62	76	53
29402	76	35	76	230	62	77	50
29403	76	42	76	230	62	82	48
29404	76	54	76	230	62	87	53
29405	89	22	89	260	70	78	58
29406	89	28	89	260	70	83	61
29407	89	35	89	260	70	84	58
29408	89	42	89	260	70	89	58
29409	89	54	89	260	70	94	63
29410	89	76	89	260	70	118	69
29411	108	22	108	310	80	90	73
29412	108	28	108	310	80	95	76
29413	108	35	108	310	80	96	69
29414	108	42	108	310	80	101	67
29415	108	54	108	310	80	106	71
29416	108	76	108	310	80	130	77
29417	108	89	108	310	80	140	80