

Copper Press Slip Coupler (M-Profile)

MCP 05



Technical Data

- Working Pressure 16 Bar @ 95°C
- "M" profile press jaws or slings
- Approved tools include Novapress, REMS, Rothenberger and Ridgid


Applicable Standards

- WRAS approved
- For use with type TX copper tubing conformant to EN 1057
- Manufactured to EN1254 standard



Features & Benefits

- Durable and secure leak proof joint
- Braze free, permanent joint - no hot works required
- Huge time and resource savings
- 25 Year warranty
- Blue plastic film which will fall off when crimped for easy identification of pressed joint
- 2 point press
- Dust Covers

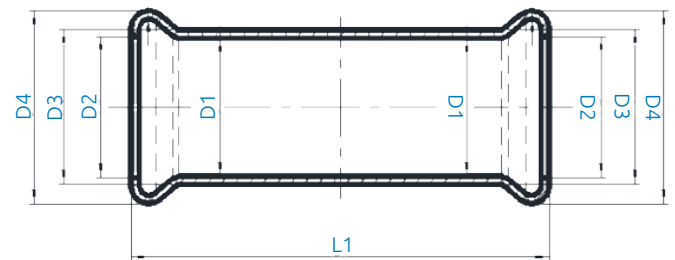

Material Specifications

NO	Description	Materials
1	Body	Cu-DHP (CW024A)
2	Crimp indicator film	PVC, Blue
3	O-Ring	EPDM
4	Dust Cap	PE

Product Codes and Dimensions

STOCK NO.	D1	D2	D3	D4	L1
27950	15	15.6	18	23	80
27951	22	22.8	25	31.3	84
27952	28	28.8	31	37.4	91
27953	35	35.7	38.3	44.7	95
27954	42	42.8	45.3	53.5	115
27955	54	54.8	57.3	65.3	139
27956	67	69.1	71.7	82.6	220
27957	76	78.6	81.1	94.4	230