

DZR Brass Double Regulating Valve - FxF BSPP

COM1 



Features and Benefits

- Drain connection 1/4" F - ISO 228
- Closing function
- Presetting possibility

Technical Data



- Temp. Range: 5 - 110 °C
- Max. Working Pressure: 25 bar

Product Specifications

- BSP Parallel ISO 228/1 Connections
- Static balancing via Venturi principle

Components & Materials Specification

- Handwheel: ABS, white color
- Body: dezincification resistant brass DZR (EN 12165 - CW602N)

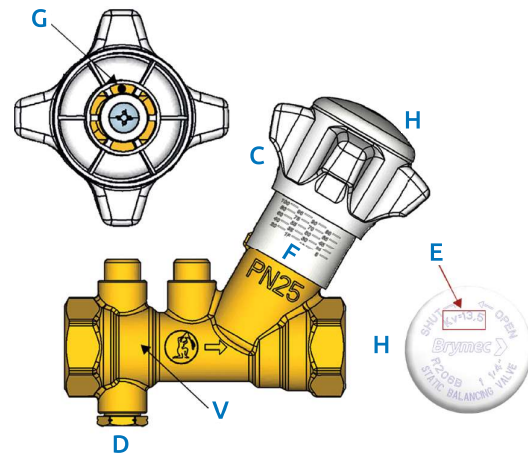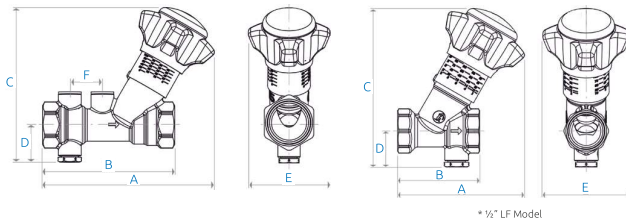

ITEM	DESCRIPTION
C	Handwheel
D	Drain 1/4" F
E	Kv of the Venturi flow meter
F	Scale for 0 - 100% setting (20 positions)
G	Presetting screw (limiting the stroke)
H	Removable head (for presetting) with imprinted the Venturi Kv

Product Codes & Dimensions

STOCK NO.	CONNECTIONS	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Kv
38897	1/2 LF	93	54	117	24	64	-	2.1
38898	1/2"	131	95	119	25	64	25	2.7
38899	3/4"	131	101	118	28	64	25	5.5
38900	1"	131	110	122	32	64	25	7.0
38901	1 1/4"	137	120	129	35	64	25	9.5
38902	1 1/2"	163	140	166	39	64	25	18.8
38903	2"	169	154	172	45	70	25	25.5

* 1/2" LF close coupled to fixed orifice plate. Request metering station datasheet for details