


# Copper Press GAS Male Iron Adaptor (M-Profile)

## MGP 45

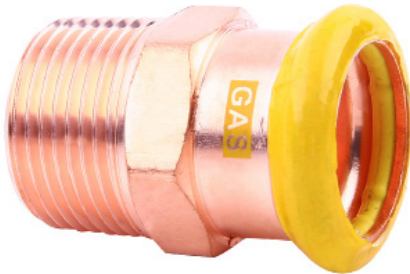

### Technical Data

- Max Working Pressure 5 Bar (External) / 1 Bar (Internal) @ 70°C
- "M" profile press jaws or slings
- Approved tools include Novapress, REMS, Rothenberger and Ridgid
- Suitable for above ground 2nd and 3rd family gases to EN437

### Applicable Standards

- For use with type TX copper tubing conformant to EN 1057




### Features & Benefits

- Durable and secure leak proof joint
- Braze free, permanent joint - no hot works required
- Huge time and resource savings
- 25 Year warranty
- Yellow plastic film which will fall off when crimped for easy identification of pressed joint
- 2 point press
- Dust covers keep O-ring clean prior to assembly

### Material Specifications

NO	Description	Materials
1	Body	Cu-DHP (CW024A)
2	Crimp indicator film	PVC, Ochre Yellow
3	O-Ring	HNBR
4	Dust Cap	PE

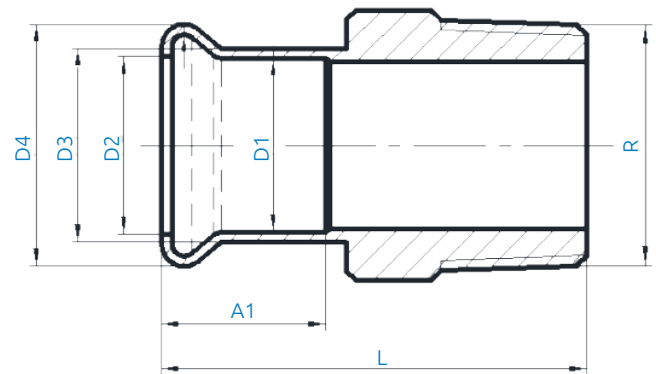

### Product Codes and Dimensions

STOCK NO.	D1 (mm)	D2 (mm)	D3 (mm)	D4 (mm)	A1 (mm)	L (mm)	R
29753	15	15.6	18	23	19	39	1/2"
29756	22	22.8	25	31.3	20	41	3/4"
29759	28	28.8	31	37.4	22	46	1"
29762	35	35.7	38.3	44.7	25	53	1 1/4"
29764	42	42.8	45.3	53.5	29	58	1 1/2"
29765	54	54.8	57.3	65.3	34	65	2"
29766	67	69.1	71.7	82.6	48	103	2 1/2"
29767	76	78.6	81.1	94.4	49	-	2 1/2"