



CHARACTERISTICS

Metal anchor: functioning by expansion

Easy installation.

Use in non-cracked concrete.

Use for medium loads

Previous installation.

BASE MATERIAL



Concrete



Reinforced Concrete



Stone

APPLICATIONS



1. INSTALLATION DATA

1.1 TWA Tie wire anchor



Properties




Carbon Steel




Zinc plated coating $\geq 5\mu\text{m}$

Sizes

CODE	TWA06060	
$\varnothing d_o$: axis diameter	[mm]	6
h_{ef} : effective depth	[mm]	40
h_{nom} : embedment depth	[mm]	49,5
h_1 : drill depth	[mm]	55
h_{min} : minimum concrete thickness	[mm]	100
d_i : hole diameter	[mm]	6
S_{cr} : critical spacing	[mm]	120
C_{cr} : critical edge distance	[mm]	60
S_{min} : minimum spacing	[mm]	50
C_{min} : minimum edge distance	[mm]	50

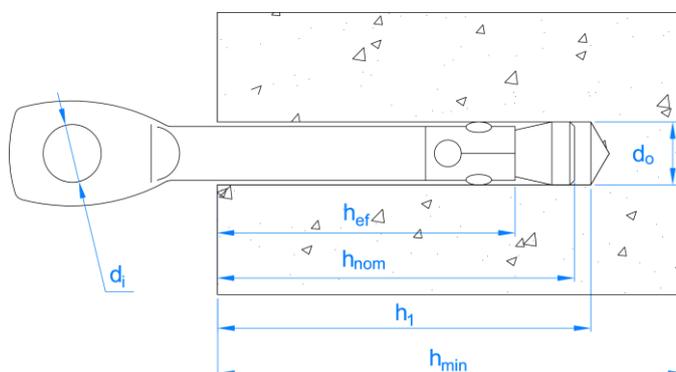


2. INSTALLATION PROCEDURE

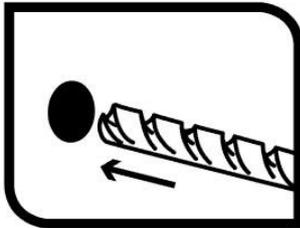

1. DRILL

Check concrete is well compacted and porosity insignificant.


Drilling must be performed at the specified minimum depth and diameter, perpendicular to the base material surface.

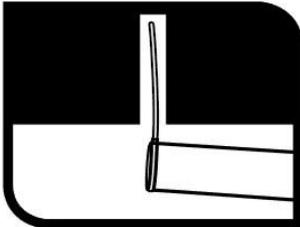

2. BLOW AND CLEAN

Clean hole of dust and debris.


Use blow-pump and cleaning brushes.

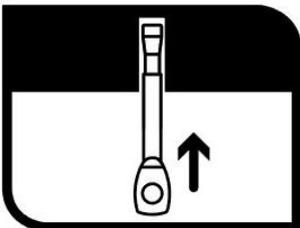

3. INSTALL

Introduce anchor 40 mm with the ring just above the base material.

Use a hammer to ensure the required depth if necessary.

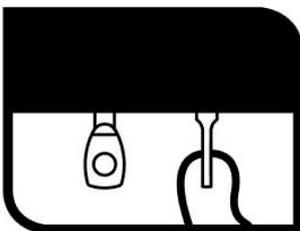

4. APPLY TORQUE

Pull the ring perpendicular to the base material expanding the anchor.

3. RESISTANCES

3.1 Characteristic Resistance: The characteristic resistance* in C20/25** concrete for an isolated anchor (without spacing and edge distance effects) are specified in the table:

CODE	METRIC	RESISTANCES		
TWA06060	M6	Characteristic Resistance (N_{Rk})	[kN]	<u>3.51</u>
		Design Resistance (N_{Rd})	[kN]	<u>1.95</u>
		Recommended Resistance (N_{recom})	[kN]	<u>1.39</u>

1 KN ≈ 100 Kg