


MINIBLUE[®] R

UNIT
3.5-8 KW


21 dba


ROTARY DIAPHRAGM


3 YEAR WARRANTY

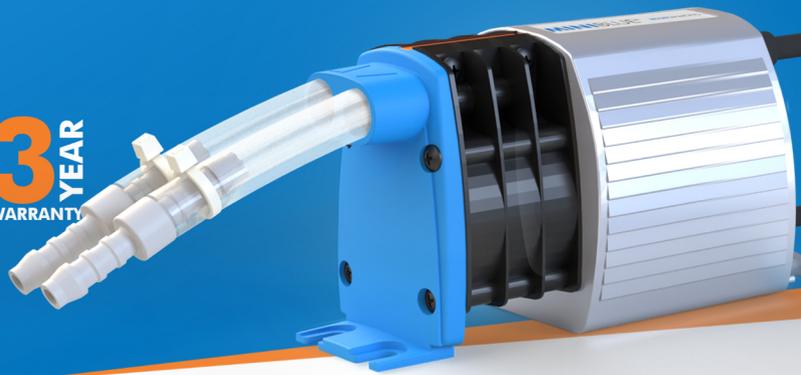

- Designed to combine performance, reliability and installation flexibility.
- Compact enough to mount remotely and incorporate the electronics needed to operate the unique thermistor controlled reservoir sensor
- MINIBLUE[®] R operates only when condensate is present

PERFORMANCE

| MAX FLOW | MAX HEAD | MAX LIFT |
|----------|----------|----------|
| 8L/HOUR | 8 METRES | 5 METRES |

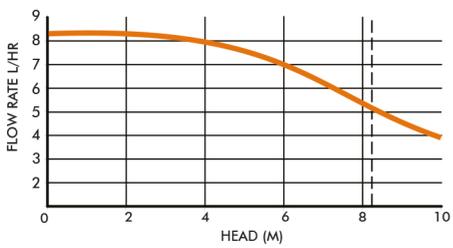

DISCHARGE PIPE RUN




SENSING OPTION

MINIBLUE[®] R pump available with:

RESERVOIR

X87-509

DIMENSIONS (MM)

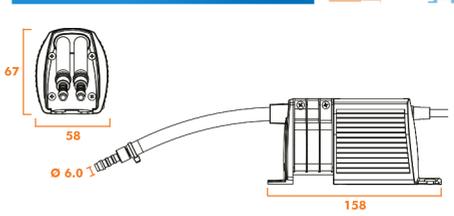

| V (VERTICAL) | H (HORIZONTAL) |
|--------------|----------------|
| 8M | 0M |
| 7M | 3M |
| 6M | 6M |
| 5M | 9M |
| 4M | 12M |
| 3M | 15M |
| 2M | 18M |
| 1M | 21M |

The MINIBLUE[®] R can be mounted in any orientation up to 8m away from the air conditioning unit.



CONTACT US
+44 (0)1932 355277
INFO@BLUEDIAMONDPMPCOM