


Copper Press GAS Female Branch Reducing Tee (M-Profile)



MGP 35

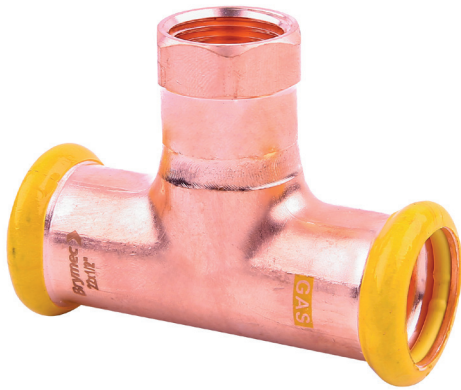

Technical Data

- Max Working Pressure 5 Bar (External) / 1 Bar (Internal) @ 70°C
- "M" profile press jaws or slings
- Approved tools include Novapress, REMS, Rothenberger and Ridgid
- Suitable for above ground 2nd and 3rd family gases to EN437


Applicable Standards

- For use with type TX copper tubing conformant to EN 1057



Features & Benefits

- Durable and secure leak proof joint
- Braze free, permanent joint - no hot works required
- Huge time and resource savings
- 25 Year warranty
- Yellow plastic film which will fall off when crimped for easy identification of pressed joint
- 2 point press
- Dust covers keep O-ring clean prior to assembly

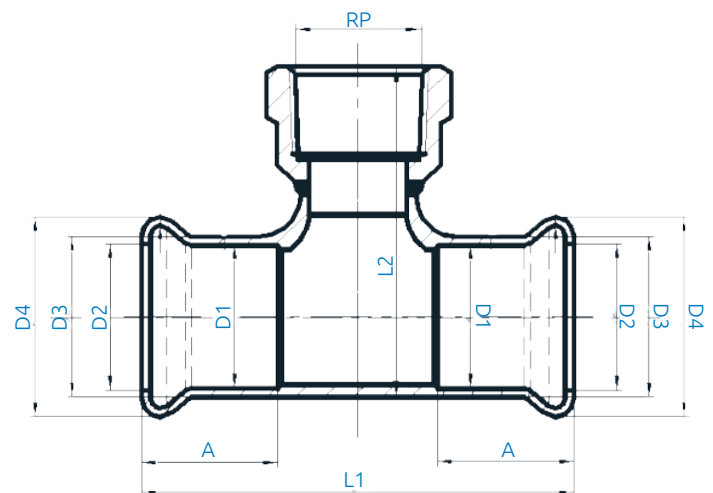

Material Specifications

NO	Description	Materials
1	Body	Cu-DHP (CW024A)
2	Crimp indicator film	PVC, Ochre Yellow
3	O-Ring	HNBR
4	Dust Cap	PE

Product Codes and Dimensions

STOCK NO.	D1 (mm)	D2 (mm)	D3 (mm)	D4 (mm)	A (mm)	L1 (mm)	L2 (mm)	RP
29744	15	15.6	18	23	19	64	48.5	1/2"
29745	22	22.8	25	31.3	20	74	55	1/2"
29747	28	28.8	31	37.4	22	84	63	1/2"
29749	35	35.7	38.3	44.7	25	91	68	1/2"
29750	42	42.8	45.3	53.5	29	98	75	1/2"
29751	54	54.8	57.3	65.3	34	123	83	1/2"