

# Copper Press GAS F x F 90° Bend (M-Profile)

## MGP 10



### Technical Data

- Max Working Pressure 5 Bar (External) / 1 Bar (Internal) @ 70°C
- "M" profile press jaws or slings
- Approved tools include Novapress, REMS, Rothenberger and Ridgid
- Suitable for above ground 2nd and 3rd family gases to EN437


### Applicable Standards

- For use with type TX copper tubing conformant to EN 1057



### Features & Benefits

- Durable and secure leak proof joint
- Braze free, permanent joint - no hot works required
- Huge time and resource savings
- 25 Year warranty
- Yellow plastic film which will fall off when crimped for easy identification of pressed joint
- 2 point press
- Dust covers keep O-ring clean prior to assembly

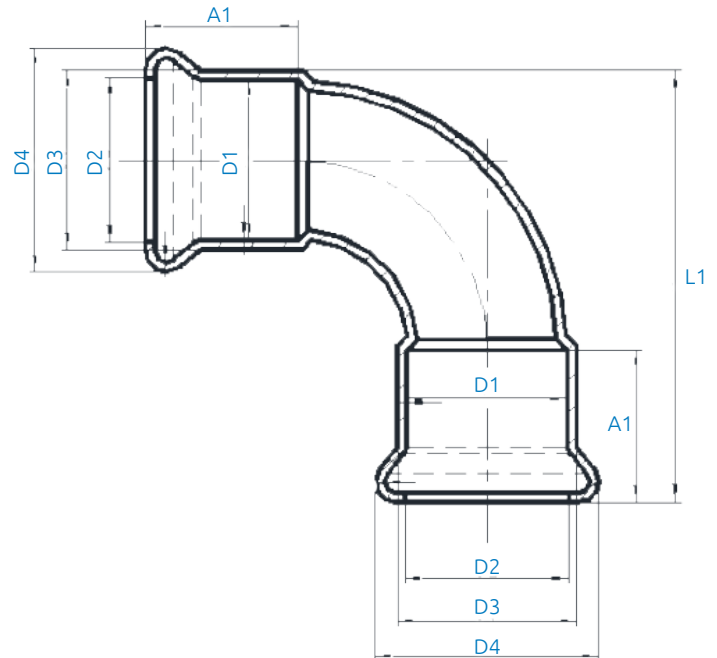

### Material Specifications

NO	Description	Materials
1	Body	Cu-DHP (CW024A)
2	Crimp indicator film	PVC, Ochre Yellow
3	O-Ring	HNBR
4	Dust Cap	PE

### Product Codes and Dimensions

STOCK NO.	D1 (mm)	D2 (mm)	D3 (mm)	D4 (mm)	A1 (mm)	L1 (mm)
29609	15	15.6	18	23	19	47
29610	22	22.8	25	31.3	20	60
29611	28	28.8	31	37.4	22	73
29612	35	35.7	38.3	44.7	25	84
29613	42	42.8	45.3	53.5	29	99
29614	54	54.8	57.3	65.3	34	126
29615	67	69.1	71.7	82.6	48	163
29616	76	78.6	81.1	94.4	49	186
29617	108	110.9	113.8	132.1	65	256