

Brymec Support System Foot




Technical Data

- UV Resistant Recycled Rubber
- Working Temperature Range: -35°C to +80°C
- All Dimensions +/- 2mm
- Weight per unit +/- 3%

Features and Benefits

- Support Small pipework, cable tray, air conditioning units and more
- Includes bonded Aluminium channel 41 x 21mm for standard strut fixings
- Made from Recycled SBR rubber, making the ECO friendly
- High anti vibration and noise absorption qualities
- Rubber base ideal for non-penetrative ground or roof installations

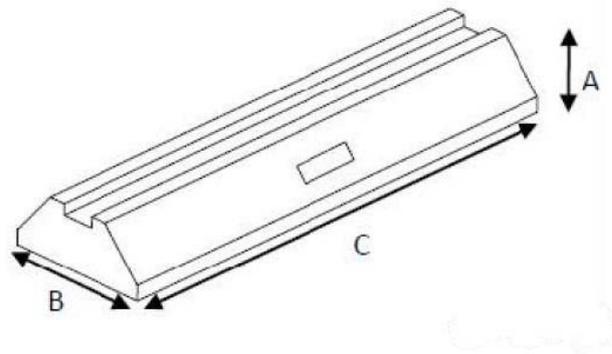

Materials Specifications

Part / Reference	Description
Channel	Aluminium
Foot Body	Bonded Black Styrene Butadiene Rubber

Product Codes and Dimensions

Stock No	Height (A) mm	Width (B) mm	Length (C) mm	Max Load per foot (KG)	Weight (KG)
19582	100	183	250	160	2.5
19583	100	183	400	240	4.3
19584	100	183	600	450	8.1
19585	100	183	1000	645	11.4