



# Type MW2 - Multiwedge 2

Designed for the Multideck MD60 and Multideck MD80 profiles manufactured by Kingspan®.



**UK CA CE** For Characteristic Resistances when designing a connection to Eurocode 3, refer to DoP No.019 (CE) or DoC No.119 (UKCA) on Lindapter's website. Alternatively, request a DoP or DoC brochure.

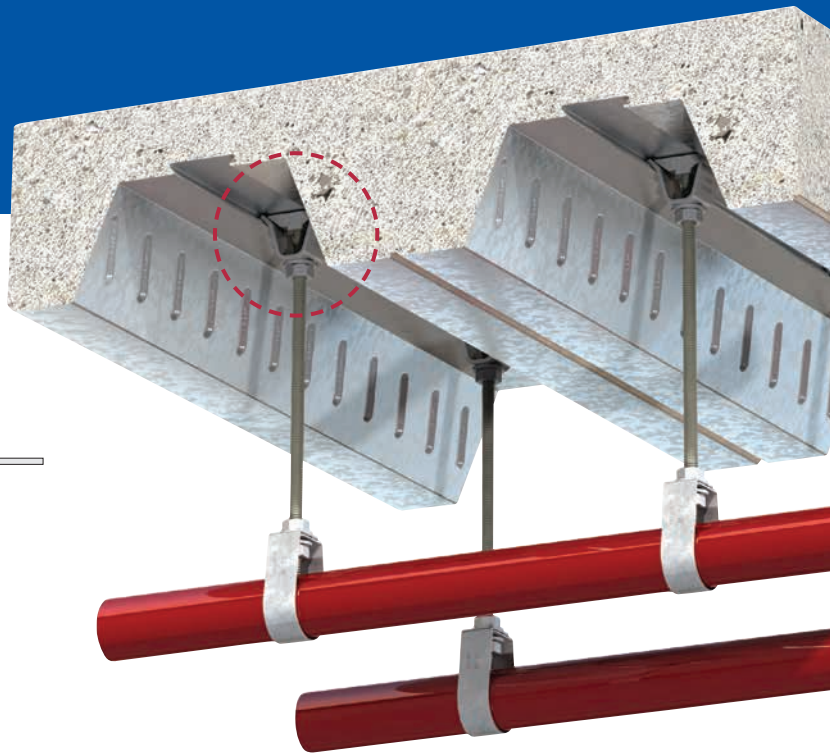


**Bracket:** Pre-galvanised strip. **Wedge:** Malleable iron, zinc plated.

Product Code	Rod min 4.6	Safe Working Load (FOS 3:1)	
		Tensile / 1 Rod kN	Tightening Torque Nm
MW06	M6	1.47	10
MW08	M8	1.47	10
MW10	M10	1.47	10

➤ For fire ratings refer to [www.Lindapter.com](http://www.Lindapter.com)

## How to install...

▶ Watch the installation video at [www.Lindapter.com](http://www.Lindapter.com)

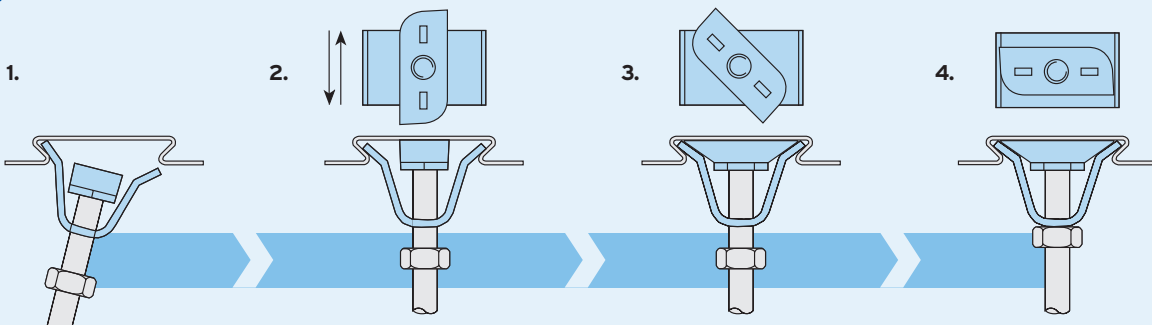

- 1) Pre-assemble the bracket and wedge (flat surface facing up) onto the threaded rod and insert one side of the bracket into the re-entrant channel of the decking.
- 2) Click the other leg of the bracket into position inside the decking and slide the assembly to the desired position along the length of the re-entrant channel.
- 3) Push and turn the wedge clockwise until it locks into the channel walls.
- 4) Tighten the hexagon nut beneath the assembly to the tightening torque specified in the table above.

- Install the decking fixings after the concrete has been poured and has reached full strength.
- If the decking profile is deformed or distorted, do not install the fixing. If in doubt, contact the Technical Support team for advice.
- Although the Type MW2 is similar in appearance to Type MF (p. 69), it should NOT be used in profiles manufactured by CMF®.

GIRDER CLAMPS  
RAIL FIXINGS  
LIFTING POINTS  
HOLLO-BOLT  
FLOOR FIXINGS  
SUPPORT FIXINGS  
DECKING FIXINGS

# Decking Fixings

High quality, cost effective connections for securing building services. Designed to fit inside the dovetail re-entrant channels of popular composite decking profiles, Lindapter's fixings provide a zero-impact method that avoids delamination and damage to the decking.

## Lindapter Decking Fixings & Compatible Composite Decking Profile(s)



**Type COM**  
page 67

Fire Rated



**Tata Steel**

ComFlor® 60, 80 and 95





**Type TR60**  
page 68

Fire Rated



**SMD®**

TR60+™ and TR80+™





**Type MF**  
page 69

Fire Rated



**CMF®**

MetFloor® 60 and MetFloor® 80





**Type MW2  
Multiwedge 2**  
page 70

Fire Rated



**Kingspan®**

Multideck MD60 and MD80





**Type AW  
Alphawedge**  
page 71

Fire Rated



**Richard Lees Decking**

Ribdeck E60




**Type AMD**  
page 72



**AMDECK®**

AMDECK® 60 and AMDECK® 80



**Type SD2  
Slimdek 2**  
page 73



**Tata Steel**

ComFlor® 225




**Type SM**  
page 74

Fire Rated



**Sigmat**

SigDeck 100



**Type VN**  
page 75

Fire Rated



**Fits several profiles including:**

AMDECK® 54, R51+™, ComFlor® 51+, Holorib, Superib, Multideck MD50 and MetFloor® 55.



### On-site capacity checks

Lindapter's Engineers can provide tensile tests on the full range of decking fixings. Available on request and subject to application.

