
Rejiband Rapide (Ref: 60512300)

16/01/2024

1/7



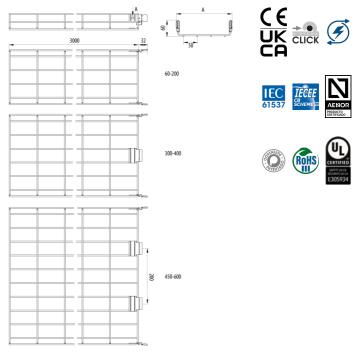

#### Description

Wire mesh tray made of steel with quick-connect Click system and rounded safety edge for the support and management of cables. Of 60 mm height, Width 300 mm, With EZ protection system. The Rejiband® Rapide Cable Tray is made up of wire mesh rods that provide high strength and elasticity. Easy to assemble, thanks to its flexibility and its quick-connect Click system, it allows the connection between sections of trays without the need for screws, which means savings in material and labour costs. Manufactured according to international standard IEC 61537. It is distributed in different sizes and in several Protection Systems.

#### **Advantages**

Flange heights of 60 or 100 mm and widths of 60, 100, 150, 200, 300, 400, 450, 500 and 600 mm with a wide range of accessories.

Rounded safety edge that prevents damage to the cables and harm to the installer.

Electrical continuity guaranteed according to standard IEC61537.

High resistance, flexibility and adaptable to each project providing a saving of more than 30% in the installation.

Rapid connection system with pre-fitted couplers reduces installation time by 40%.

#### **Applications**

Rapid installation of wire mesh trays for the Support, management and distribution of cables in Electrical and/or telecommunications installations in: Civil Works, Tunnels, Car Parks, Public Buildings, Shopping Centres, Major Infrastructures, Airports, Underground and Railway, Tertiary sector and industrial applications: Naval, Petrochemical, Textile, Chemical and Food.

### Solutions







CENTROS DE DATOS EDIFICACIÓN. TERCIARIO RESISTENCIA AL FUEGO

















Rejiband. Wire mesh trays 16/01/2024

Rejiband Rapide (Ref: 60512300)

2/7

## **Product data**

Protection System	EZ	u	12
Finish	EZ3, Electrogalvanised	Material	Steel with surface coating
Resistance Class	Class 3	Impact Strength (J)	20 J
Flange (mm)	60	Section (mm2)	14420
Width (mm)	300	Working temperature range (°C)	-50 / 150 °C
Length (m)	3	Fire resistance	A1 No combustible
kg/u	1.725		

### **S** Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

## **M** Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic














## Rejiband Rapide (Ref: 60512300)

16/01/2024


3/7


## **Load diagrams**



EZ B	C BK8	
		mm²
60	60	2.520
	100	4.420
	150	6.783
	200	9.333
	300	14.050
	400	19.050
	450	21.500
	500	24.050
	600	29.050

Valores certificados por: Values certified by: Valeurs certifiées par: Valores certificados por:





EZ BC BK8			
		mm²	
100	100	7.462	
	150	11.562	
	200	16.290	
	300	25.290	
	400	34.290	
	450	39.396	
	500	43.290	
	600	52.290	

Valores certificados por: Values certified by: Valeurs certifiées par: Valores certificados por:





# **Product applications**












Rejiband. Wire mesh trays 16/01/2024

Rejiband Rapide (Ref: 60512300)

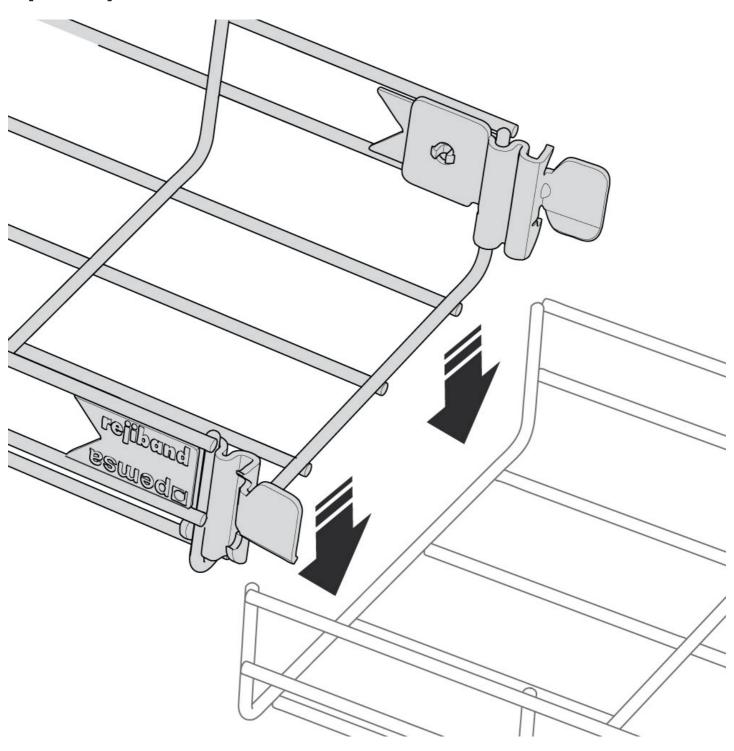










Rejiband Rapide (Ref: 60512300)

16/01/2024

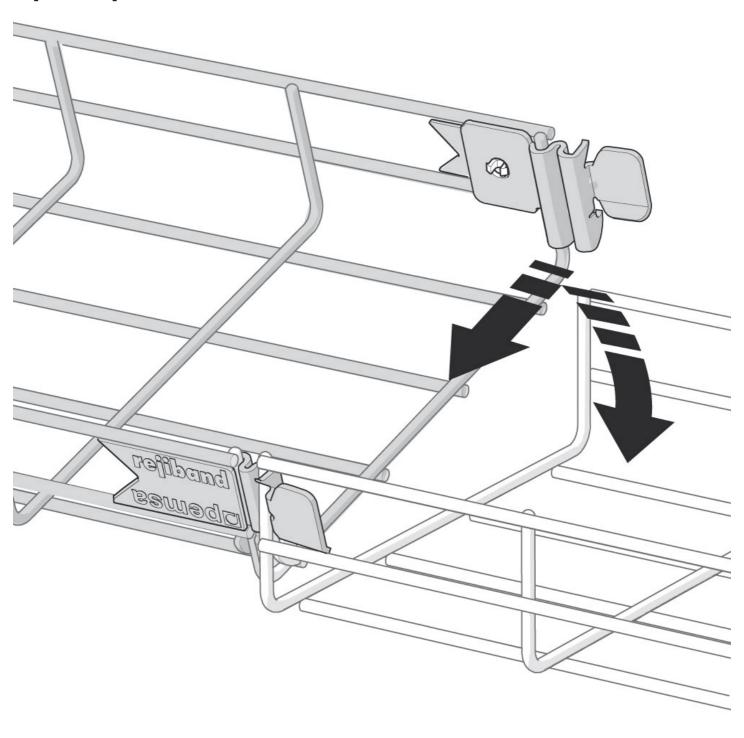












16/01/2024

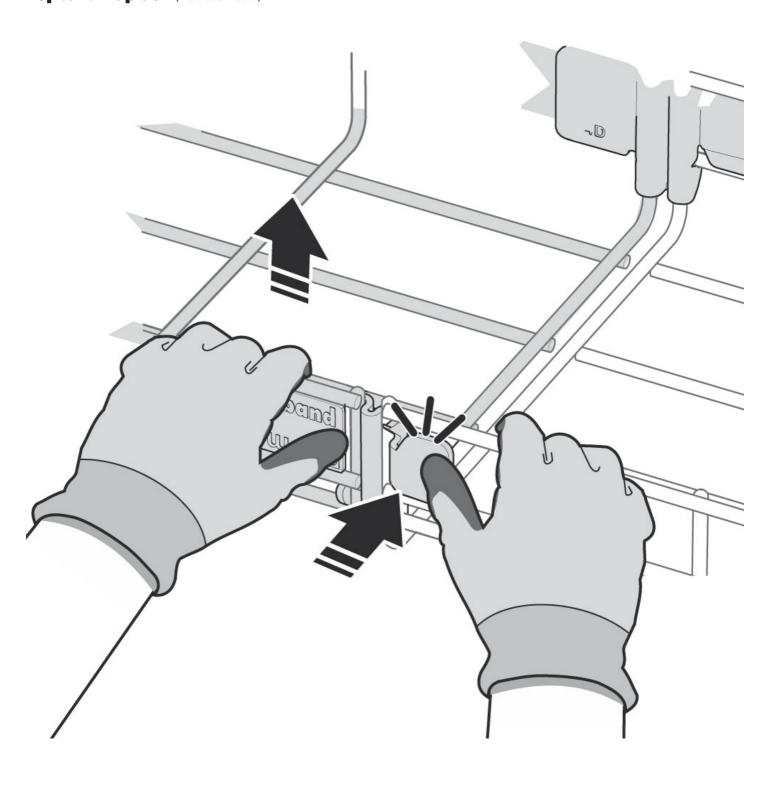











16/01/2024

