

Copper Press GAS Coupler (M-Profile)

MGP 01



Features & Benefits

- Durable and secure leak proof joint
- Braze free, permanent joint - no hot works required
- Huge time and resource savings
- 25 Year warranty
- Yellow plastic film which will fall off when crimped for easy identification of pressed joint
- 2 point press
- Dust covers keep O-ring clean prior to assembly

Material Specifications


NO	Description	Materials
1	Body	Cu-DHP (CW024A)
2	Crimp indicator film	PVC, Ochre Yellow
3	O-Ring	HNBR
4	Dust Cap	PE

Technical Data

- Max Working Pressure 5 Bar (External) / 1 Bar (Internal) @ 70°C
- "M" profile press jaws or slings
- Approved tools include Novapress, REMS, Rothenberger and Ridgid
- Suitable for above ground 2nd and 3rd family gases to EN437

Applicable Standards

- For use with type TX copper tubing conformant to EN 1057

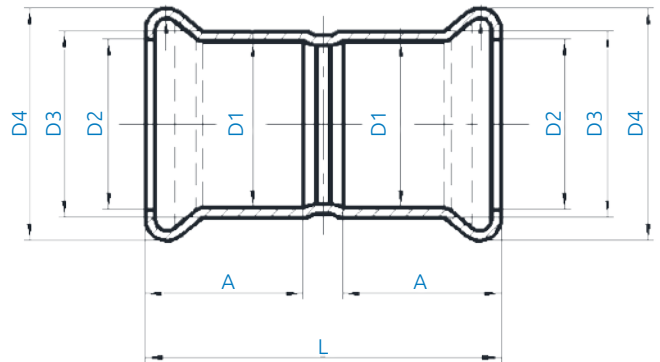

Product Codes and Dimensions

STOCK NO.	D1 (mm)	D2 (mm)	D3 (mm)	D4 (mm)	A (mm)	L (mm)
29702	15	15.6	18	23	19	44
29703	22	22.8	25	31.3	20	46
29704	28	28.8	31	37.4	22	50
29705	35	35.7	38.3	44.7	25	58
29706	42	42.8	45.3	53.5	29	67
29707	54	54.8	57.3	65.3	34	80
29708	67	69.1	71.7	82.6	48	107
29709	76	78.6	81.1	94.4	49	108
29710	108	110.9	113.8	132.1	65	147