

Copper Press Female Branch Reducing Tee (M-Profile)

MCP 35



Technical Data

- Working Pressure 16 Bar @ 95°C
- "M" profile press jaws or slings
- Approved tools include Novapress, REMS, Rothenberger and Ridgid
- Female thread BSPP

Applicable Standards


- WRAS approved
- For use with type TX copper tubing conformant to EN 1057
- Manufactured to EN1254 standard

Features & Benefits

- Durable and secure leak proof joint
- Braze free, permanent joint - no hot works required
- Huge time and resource savings
- 25 Year warranty
- Blue plastic film which will fall off when crimped for easy identification of pressed joint
- 2 point press
- Dust Covers

Material Specifications

NO	Description	Materials
1	Body	Cu-DHP (CW024A)
2	Crimp indicator film	PVC, Blue
3	O-Ring	EPDM
4	Dust Cap	PE

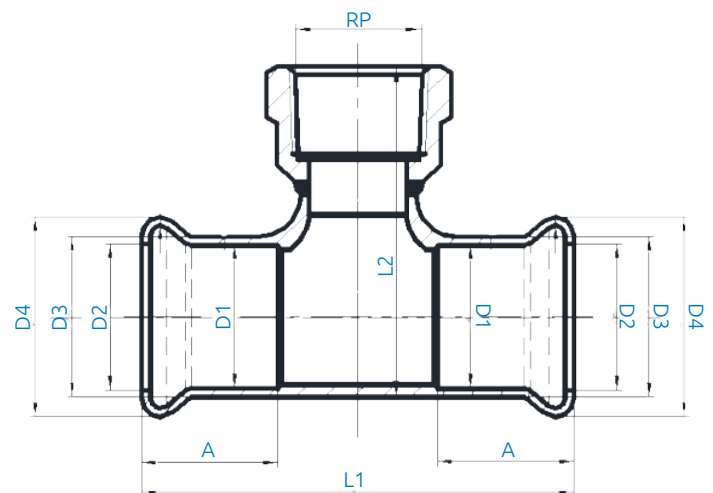

Product Codes and Dimensions

STOCK NO.	D1	D2	D3	D4	A	L1	L2	RP
28101	15	15.6	18	23	19	64	48.5	1/2"
28102	22	22.8	25	31.3	20	74	55	1/2"
28104	28	28.8	31	37.4	22	84	63	1/2"
28106	35	35.7	38.3	44.7	25	91	68	1/2"
28108	42	42.8	45.3	53.5	29	98	75	1/2"
28110	54	54.8	57.3	65.3	34	123	83	1/2"