


Stainless Steel Plain Plug

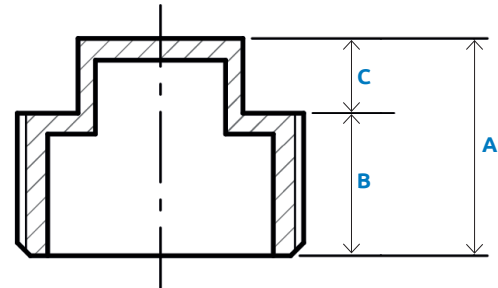


Features and Benefits

- Made from CF8M (316) Stainless Steel material and conform to ISO 4144 standard.
- Threads are to BSP Taper (ISO 7/1) or NPT (ANSI B1.20.1).
- Material certificates available on request.
- Tested & inspected prior to despatch.
- 12 month warranty from date of installation.
- Manufactured in accordance with ISO9001:2015 quality system.

Product Codes and Dimensions

STOCK NO.	SIZE	A	B	C	Kgs
39624	1/2"	22.6	13.6	9.0	0.030
39625	3/4"	25.0	15.0	10.0	0.039
39626	1"	26.0	15.0	11.0	0.056
39627	1 1/4"	29.0	18.0	11.0	0.089
39628	1 1/2"	30.0	18.0	12.0	0.112
39629	2"	35.0	22.0	13.0	0.170

Temperature (°C)	Non-shock maximum working pressure (bar)
-20 to 40	20
100	16.5
150	15
200	14
220	13.5

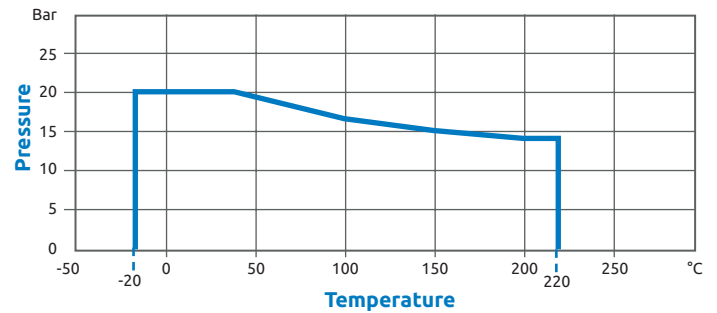

- Pressure for intermediate temperatures may be determined by the interpolation method.
- Temperatures indicated are those of internal fluid.
- Piping loads, stresses and moments are not taken into account.