

# Stainless Press 45 MxF Bend



## Technical Data

- Operating temperature -20°C ~ +120°C
- 316L Stainless Steel fitting
- EPDM Sealing ring
- "M" Profile Press Jaws or slings
- Approved tools include Novapress, REMS, Rothenberger and Ridgid
- Max Working Pressure
  - 15mm - 28mm : 40 bar
  - 35mm - 54mm : 25 bar
  - 76mm - 108mm : 16 bar

## Features and Benefits


- Suitable for Potable water, Cooling systems, Industrial applications
- High grade Stainless Steel is extremely durable and corrosion resistant
- Blue plastic film which will fall off when crimped for easy identification of pressed joint
- Dust covers
- 30 Year Warranty

## Material Specifications

Description	Materials
Body	316L Stainless Steel
Crimp indicator film	PVC, Blue
O-Ring	EPDM
Dust Cap	PE

## Applicable Standards

- WRAS Approved
- 316L grade stainless steel fitting
- DVGW-W534

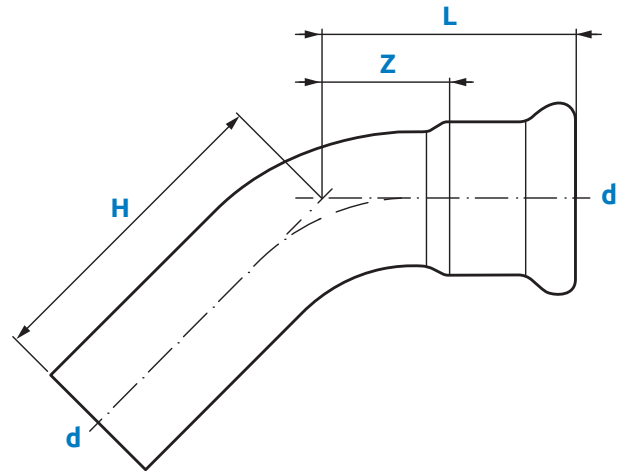

## Product Codes and Dimensions

STOCK NO.	d (mm)	L (mm)	H (mm)	Z (mm)
29336	15	32	43	12
29337	22	38	52	18
29338	28	42	56	22
29339	35	52	62	28
29340	42	60	72	30
29341	54	72	84	37
29343	76	102	120	49
29344	89	115	134	55
29345	108	142	163	67