

# Copper Press F x F 45° Bend (M-Profile) MCP 11



## Features & Benefits

- Durable and secure leak proof joint
- Braze free, permanent joint - no hot works required
- Huge time and resource savings
- 25 Year warranty
- Blue plastic film which will fall off when crimped for easy identification of pressed joint
- 2 point press
- Dust Covers

## Material Specifications


NO	Description	Materials
1	Body	Cu-DHP (CW024A)
2	Crimp indicator film	PVC, Blue
3	O-Ring	EPDM
4	Dust Cap	PE

## Technical Data

- Working Pressure 16 Bar @ 95°C
- "M" profile press jaws or slings
- Approved tools include Novapress, REMS, Rothenberger and Ridgid

## Applicable Standards

- WRAS approved
- For use with type TX copper tubing conformant to EN 1057
- Manufactured to EN1254 standard

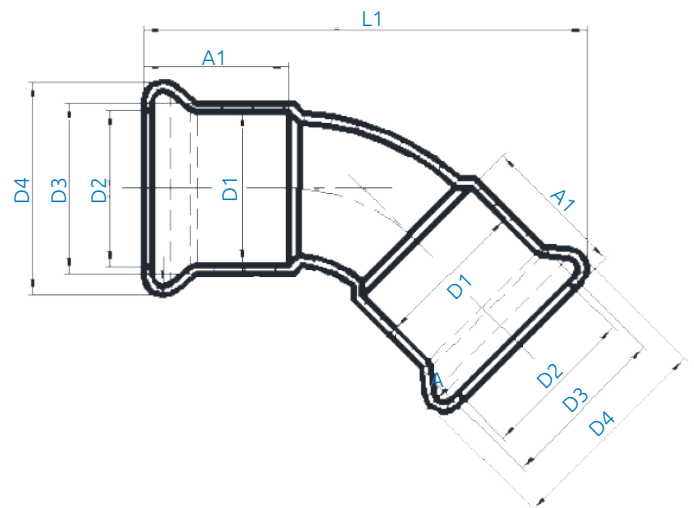

## Product Codes and Dimensions

STOCK NO.	D1	D2	D3	D4	A1	L1
27830	15	15.6	18	23	19	54
27831	22	22.8	25	31.3	20	64
27832	28	28.8	31	37.4	22	74
27833	35	35.7	38.3	44.7	25	82
27834	42	42.8	45.3	53.5	29	97
27835	54	54.8	57.3	65.3	34	118
27836	67	69.1	71.7	82.6	48	169
27837	76	78.6	81.1	94.4	49	184
27839	108	110.9	113.8	132.1	65	253